



UBB Polarizers
(mounting optional)

Ultra Broadband polarizers are designed to offer an excellent solution for almost any multi-wavelength application. The wide-band characteristics of this polarizer, enables a wide range of products and technologies. Performance begins at 300nm and works well throughout the visible and infrared range enabling its use in a wide variety of applications (see sidebar). With anhydrous Fused Silica substrate material, the performance will work well up to the 4µm wavelength.

As with all ProFlux® polarizers, the UBB series are capable of large acceptance angle which eases alignment concerns. Durability is similarly equivalent to all our ProFlux products recognized for their high durability in hot and environmentally difficult applications.

Moxtek's advanced manufacturing technology is able to manufacture precision polarizers in high volume quantities for spectroscopy, astronomy, communications, semiconductor, machine vision, and other applications.

Applications

- FTIR Spectroscopy
- UV Curing, Exposure
- IR Imaging
- Forensics
- Communications
- Semiconductor
- Machine Vision
- Microscopy

Features	Benefits
Nanowire® Technology	Brightness and contrast uniformity
	±20° AOI without depolarization
	Wavelength and AOI independent
	Broadband
Inorganic	High heat resistant

Substrate Specifications

Standard Product Options	
Product Name	Description
UBB01A	Broadband (3-5 µm) (300-3,250nm)
UBB02A	High Transmission (400-1,100nm)

*See OPT-DATA-1011 for mounting options


	UBB01A	UBB02A
<i>Substrate Type:</i>	Fused Silica	Display Grade Glass
<i>Thickness:</i>	1.0mm ± 0.1	0.7mm ± 0.07
<i>Index of Refraction:</i>	430nm: 1.4672 1000nm: 1.4504	435.8nm: 1.5198 643.8nm: 1.5078
<i>Thermal Expansion:</i>	5.5 x 10 ⁻⁷ /°C	31.7 x 10 ⁻⁷ /°C (0-300°C)

General Specifications

<i>Wavelength Range:</i>	300nm - >3,250nm	400nm - 1,100nm
<i>AR Coating:</i>	Not standard	Not standard
<i>Dimensional Tolerance:</i>	± 0.4mm	± 0.2mm
<i>Edge Exclusion:</i>	2mm	2mm
<i>Transmission Axis (TA):</i>	Referenced to long side of part	± 1°
<i>TA Tolerance:</i>	± 1°	0° ± 20°
<i>Angle of Incidence:</i>	0° ± 20°	200° C > 5,000 hours
<i>Maximum Temperature:</i>	200° C > 5,000 hours Compliant	Compliant


UBB01A Typical Optical Performance

This graph shows typical optical performance of the UBB01A for 300-3250nm. Excellent transmission is maintained throughout the visible and well into the IR spectrum. Contrast continuously increases throughout this range.

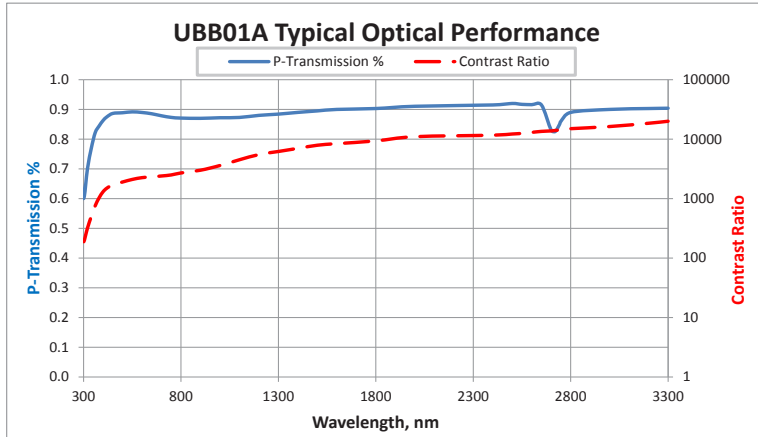

UBB02A Typical Optical Performance

The graph shows typical optical performance for the UBB02A for 400-1100nm. Extremely high transmission is maintained throughout the visible and well into the IR spectrum.

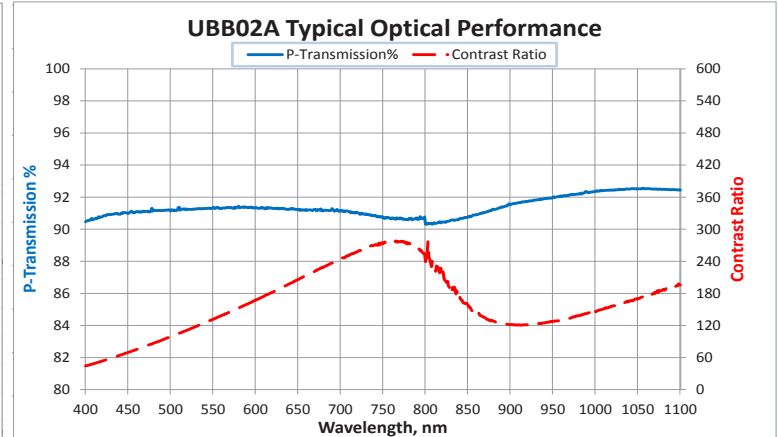

Performance Specifications (Minimum)

The specifications shown in the Table below are the guaranteed performance minimum on these products.

Performance	Range (nm)	300nm		400nm		450nm		550 nm		650nm		800nm		1100nm		1000-2500nm		3200nm	
		Tp	CR	Tp	CR	Tp	CR	Tp	CR	Tp	CR	Tp	CR	Tp	CR	Tp	CR	Tp	CR
UBB01A	300-3200	50	30	Not Measured		82	600	83	650	81	650	79	700	82	800	82	800	*86	*5000
UBB02A	400-1100	-	-	89	40	90	40	90	100	90	100	90	100	90	100	-	-	-	-

*Not measured on all parts

For warranty and ordering information, please visit www.moxtek.com.



452 West 1260 North / Orem, UT 84057
 Phone 801.225.0930 / Fax 801.221.1121
www.moxtek.com
info@moxtek.com