




ProLINE 10 (no metal support grid)

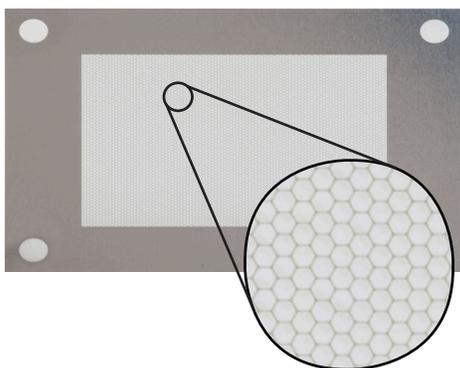

ProLINE 20 (metal support grid)

ProLINE™ Series windows are ideal for applications that require high transmission of low energy x-rays. ProLINE Series windows have higher performance than stretched polypropylene and other commonly used WDXRF windows. ProLINE windows are typically used for flow proportional counter systems.

Features

Benefits

Ultra-thin polymer film	High transmission of low energy x-rays
Metal support mesh (ProLINE 20)	Additional strength, improved differential pressure performance
Thin aluminum coating	Charge dissipation
	UV, IR, and visible light rejection
Large open area	High count rate
High purity	Minimal spectral contamination
Uniform thickness	Consistent transmission

Window Composition

ProLINE Series windows are composed of an ultra-thin layer of Moxtek® polymer and a charge dissipative layer of aluminum attached to a thin metal frame. Window frames may be provided by the customer or by Moxtek. Custom window thicknesses available for individual applications.

X-ray Transmission

ProLINE Series windows are ideal for applications that require high transmission of low energy x-rays. ProLINE 10 windows have 100% open area without metal support. ProLINE 20 windows have reduced transmission due to the metal support grid. See transmission chart on the next page.

Vacuum Tightness

Windows typically have a leak rate of less than 1×10^{-3} mbar • L/s of helium. Moxtek does not measure the leak rate of ProLINE windows.

Mechanical Strength

ProLINE Series 10 and 20 windows are more than four times stronger than polypropylene windows of the same thickness. ProLINE 20 windows are supported by a strong metal support grid. ProLINE 20 windows have withstood hundreds of cycles at a differential pressure of 1.2atm without degradation in window performance.

Charge Dissipation

ProLINE Series windows are typically coated with 200Å of aluminum for charge dissipation and light rejection. Custom thicknesses can be requested.

Applications

WDXRF Systems




- Flow proportional counters
- Microanalysis
- Column separation windows
- Detector arrays
- Electron windows



Window Sizes and Active Area

Window active area geometry can be circular or rectangular. Maximum rectangular active area dimensions are 2.8" x 2.8" (70mm x 70mm). Maximum circular active area diameter is 4.0" (101.6mm).

ProLINE Series Transmission

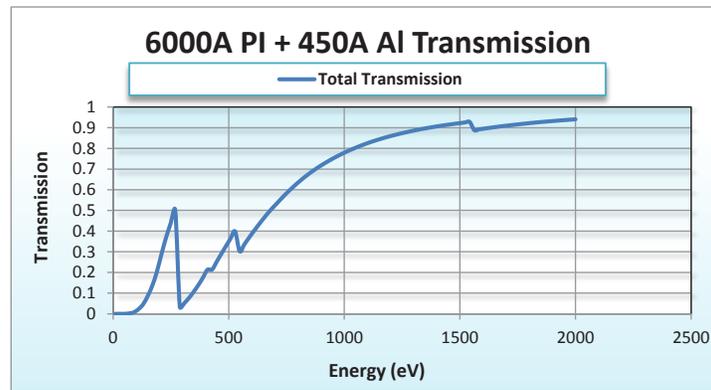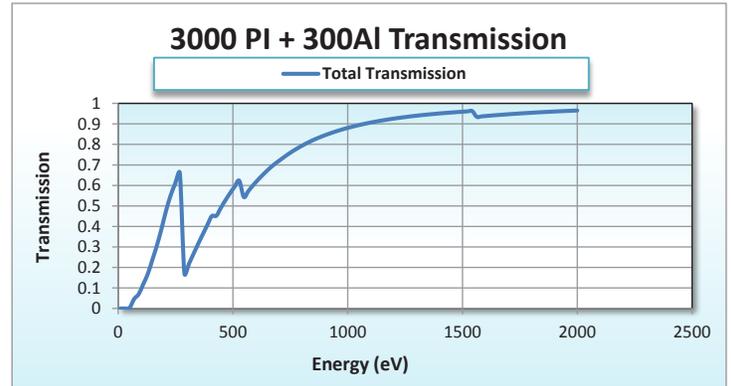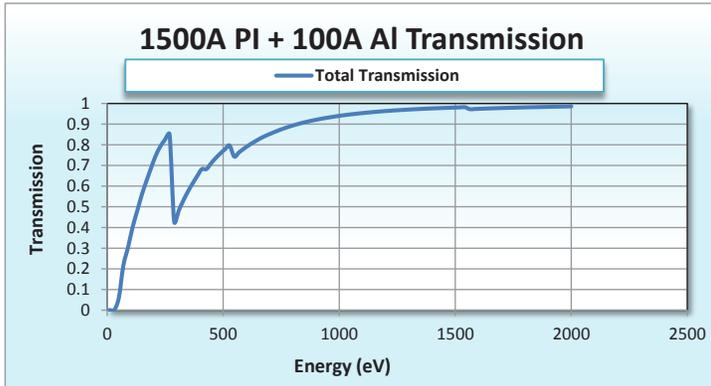

Mounting

Care should be taken to not flex the mount as damage to the window may occur.

ProLINE Series windows are bonded to metal mounts which can be supplied by either the customer or Moxtek. The preferred mount material is stainless steel 300 series. If another material must be used, Moxtek will need to approve the material. A drawing that illustrates the orientation of the window frame with respect to the metal mount should be supplied.

For warranty and ordering information, please visit www.moxtek.com.



452 West 1260 North / Orem, UT 84057
Phone 801.225.0930 / Fax 801.221.1121
www.moxtek.com
info@moxtek.com

WIN-DATA-1002, Rev D
Subject to technical change without notice