

# Short Wave Wire-Grid IR Polarizers

BIR Series Datasheet



BIR Polarizers  
(mounting optional)

## Applications

- Thermal Imaging
- Forensics
- Medical
- Microscopy
- Night Vision Goggles (NVG), low light imaging
- Spectroscopy
- Security

## Standard Product Options

Product Name	Description
BIR04A	High Contrast
BIR05A	High Transmission

See OPT-DATA-1011 for size and mounting options

The ProFlux® BIR Series Infrared polarizer, designed using Moxtek® Nanowire® Technology, provides unparalleled broadband infrared performance. Moxtek's high volume production capacity ensures availability and supports high volume applications.

BIR polarizers are designed and manufactured to support broadband applications to easily match your applications design goals. BIR04A High Contrast Infrared Polarizer is optimized for ultimate contrast while BIR05A High Transmission Infrared Polarizer is designed for optical efficiency.

BIR04A and BIR05A Infrared Polarizers can also be customized to deliver contrast and performance levels to meet your specific application and design parameter needs. Please contact Moxtek sales representatives for more information.

Features	Benefits
Nanowire® Technology	Brightness and contrast uniformity
	±20° AOI without depolarization
	Wavelength and AOI independent
	Broadband
Inorganic	High heat resistance

## General Specifications

*Wavelength Range:* 700 - 2,500nm (see back page)

*Substrate Type:* Display Grade Glass

*Substrate Thickness:* 0.7 ±0.07mm

*Index of Refraction:* 1.5198 (435.8nm)  
1.5078 (643.8nm)

*Thermal Expansion:* 31.7 x 10<sup>-7</sup>/°C (0 - 300°C)

*AOI (Angle of Incidence):* 0° ±20°

*AR Coating:* None

*Maximum Temperature:* 200°C, >5,000 hours

*Transmission Axis (TA):* Referenced to long side of part

*TA Tolerance:* ±1°

*Dimensional Tolerance:* ±0.2mm

*Edge Exclusion:* 2mm

*RoHS:* Compliant

Do not touch or clean the wire-grid polarizer surface otherwise the polarizer will be damaged.





## Performance Specifications at Normal Incidence

Product	900nm		1400nm		1900nm		2400nm	
	Tp% (min)	Ts% (max)	Tp% (min)	Ts% (max)	Tp% (min)	Ts% (max)	Tp% (min)	Ts% (max)
<b>BIR04A</b>	81.5	0.071	87.7	0.029	88.9	0.016	88.5	0.015
<b>BIR05A</b>	88.1	0.529	91.0	0.172	91.3	0.114	90.2	0.090

Tp- Transmitted “p” polarization, Ts- Transmitted “s” polarization

Note: Performance specifications are for polarizers manufactured on high grade display glass. Polarization for wavelengths greater than 2,700nm is available by using fused silica and other substrates. Please contact us to discuss your application requirements.

## Example Optical Performance (Tested at 0°)

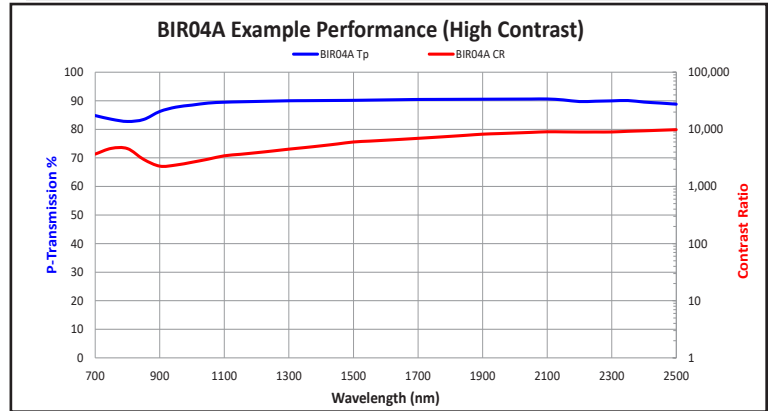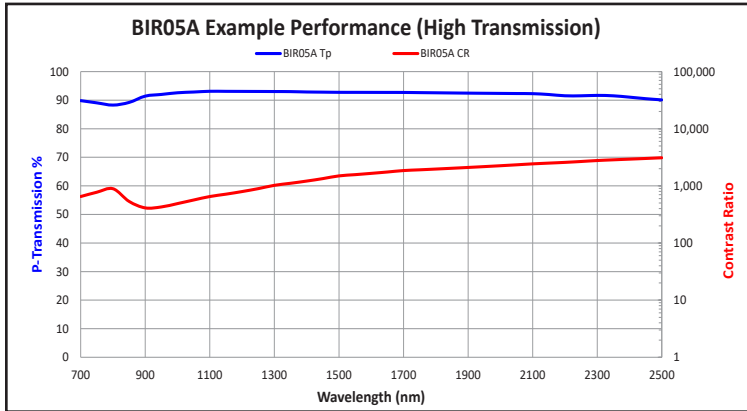

Performance data was taken from sample evaluations. Some part-to-part variation is expected.



Image courtesy of NASA/JPL-Caltech. Image of Stellar Snake enabled by IR polarizer technology.



Broadband IR polarization, such as provided by Moxtek BIR04A and BIR05A, is essential in enhancing night vision and deep space imaging applications that generate stunning images.



**Moxtek, Inc.**  
452 West 1260 North  
Orem, UT 84057  
P 801.225.0930  
moxtek.com

Performance data was taken from sample evaluations. Some part-to-part variation is expected.  
For warranty and ordering information, please visit [moxtek.com](http://moxtek.com).