



Wire-Grid Mid-Long Wave IR Polarizers

UV Series Datasheet



SIR Polarizer
(mounting optional)

ProFlux® SIR Series Infrared polarizers provide excellent broadband infrared performance for applications in the 3-12μm wavelengths. These IR polarizers utilize Moxtek's unique Nanowire® Technology, specially engineered anti-reflective coatings, and high quality thin silicon substrates to achieve high transmission and contrast. Moxtek's high volume production capacity ensures availability of parts sized to fit your application.

Applications

- Thermal Imaging
- NVG (Night Vision Goggles)
- Forensics
- Medical
- Microscopy
- Spectroscopy
- Security
- Faraday Isolators

Standard Product Options

Product Name	Description
SIR 3-5	Broadband (3-5 μm)
SIR 8-12	Broadband (8-12 μm)
See OPT-DATA-1011 for mounting options	

Square (S-Mount)

OD Length x Width	ID Length x Width
12.5mm	6mm
25mm	18mm
50mm	42mm

Circular (Octagon in Circular D-Mount)

OD Diameter	ID Diameter
12.5mm	8mm
25mm	19mm
50mm	42mm

Parts are mounted to an aluminum frame. Other sizes are available upon request. Please contact a sales representative for options and ordering details.

*See OPT-DATA-1011 for size and mounting options

Features	Benefits
Nanowire® Technology	Brightness and contrast uniformity
	±20° AOI without depolarization
	Wavelength and AOI independent
	Broadband
Inorganic	High heat resistance

General Specifications

Wavelength Range: 3-5μm and 8-12μm

Substrate Type: Silicon

Thickness: 0.675mm ± 0.095mm

Index of Refraction: 10.33μm : 3.421

4.13μm : 3.427

Thermal Expansion: 2.6 x 10⁻⁷ / °C

AR Coating: Custom engineered for mid-wave or long-wave IR

Dimensional Tolerance: ± 0.4mm

Edge Exclusion: 2mm

Transmission Axis (TA): Referenced to long side of part

TA Tolerance: ± 2°

Angle of Incidence: 0° ± 20°

Maximum Temperature: 200°C > 5,000 hours

Part Shape: Square or rectangle

RoHS: Compliant



Performance Specification Table at Normal Incidence

Product	3.0 μ m		3.7 μ m		5.0 μ m		8.0 μ m		10.6 μ m		12.0 μ m	
	MIN Tp (%)	MIN CR	MIN Tp (%)	MIN CR	MIN Tp (%)	MIN CR	MIN Tp (%)	MIN CR	MIN Tp (%)	MIN CR	MIN Tp (%)	MIN CR
SIR3-5	90	5,000 (37.0 dB)	95	5,000 (37.0 dB)	94	7,000 (38.5 dB)	-	-	-	-	-	-
SIR8-12	-	-	-	-	-	-	85	7,000 (38.5 dB)	81	7,000 (38.5 dB)	75	7,000 (38.5 dB)

Laser Damage Threshold (LDT) Table

Product	LDT Results (kW/cm ²)		LDT Test Parameters		
	Blocking	Passing	Wavelength (μ m)	Diameter of Beam (μ m)	Exposure Duration
SIR3-5*	0.64	>14	3.3	150	20 minutes
SIR8-12†	100	10	10.6	360	30 seconds


Disclaimer: SIR products are not designed for high power laser applications. The least fluence failure Laser Damage Threshold (LDT) performance results listed above are not specifications and should only be used as a design guideline. These results do not represent a guarantee of performance in any given application. LDT performance subject to change without notice.

* 7 ns, 25 kHz pulsed Optical Parametric Oscillator (OPO) source

† Nanowires facing laser source


Performance Graphs

SIR3-5 Performance Graph

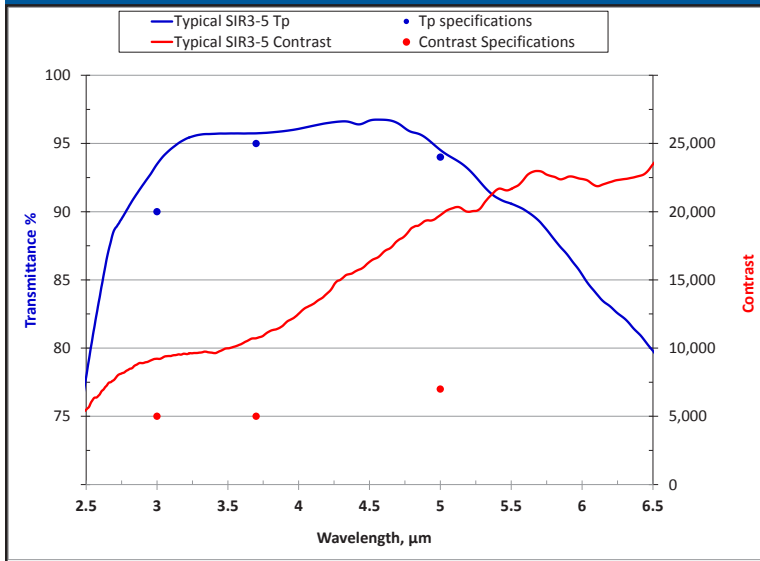

SIR3-5 Typical Performance Curves and Specifications

SIR8-12 Performance Graph

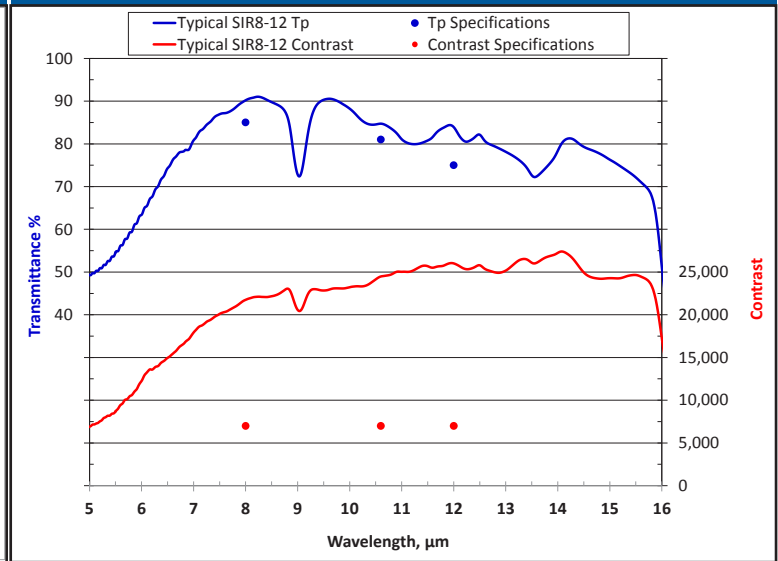

SIR8-12 Typical Performance Curves and Specifications

SIR3-5 transmission performance is typically above 90% with contrast typically above 8,000:1 in the passing state.

SIR8-12 transmission performance is typically above 68% with contrast typically above 20,000:1 in the passing state.

For warranty and ordering information, please visit www.moxtek.com.



452 West 1260 North / Orem, UT 84057
 Phone 801.225.0930 / Fax 801.221.1121
www.moxtek.com
info@moxtek.com